

610/660

Spot tacking



Discover the wide range of applications for our automatic spot tacking machines

From jackets, trousers, dresses and pullovers to shirts, scarves and ties - this machine is suitable for countless applications! In menswear and womenswear production, the machine performs important tasks such as tacking labels, securing linings, seams and hems as well as fixing lapel points of jackets.

Both thin and thick fabrics can be processed by simply exchanging the stitch plate with different cut-outs. The stitch loosening finger makes it possible to sew the loosest of spot tacks.

The removable support table and cylinder arm make it easy to work with a wide range of applications.

MAIER 610

Discover the functionality and flexibility of the MAIER 610 tacker! The manual stitch depth adjustment allows you to set the machine precisely to your fabric thickness.

MAIER 610-2


With two manually adjustable stitch depths, you can quickly and easily switch between two settings using the knee switch.

MAIER 660

Up to 99 different stitch depths can be stored and recalled individually selected or in programmed sequences using stepper motor technology.

This feature is useful in applications that require the stitch depth setting to be changed several times, such as in tacking trouser waistbands.

The integrated display makes it easy to set the stitch depth precisely.

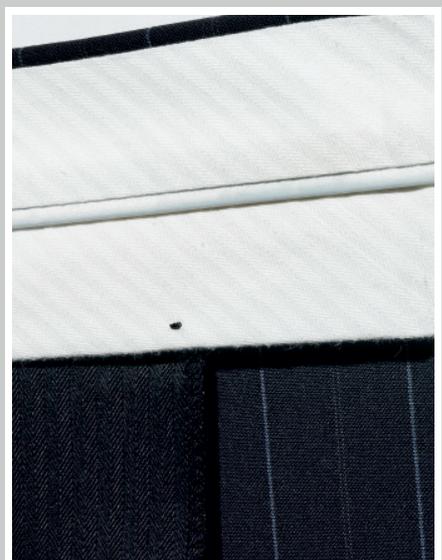



Options and accessories

Top equipment makes the class 610 and 660 the ideal solution for all spot tacking applications.

For medium material -1/8.0

Stitch plate and plunger are adapted for sewing medium material.

For heavy material -1/10

Stitch plate and plunger are adapted for sewing heavy material.

For lapel points -1/SF

Stitch plate and diver are specially adapted for fixing lapel points of jackets.

Positioning indicator -Laser

A red laser dot indicates where the point bar tack is sewn. This simplifies the positioning of the work piece.

Sewing light -LED

Our high-quality LED sewing light provides bright, even light directly above your sewing area. No more tedious squinting or shadow play - with our light you always have the best view.

Technical Specifications

Stitch description	Single-thread chainstitch
Stitch type	Spot tack
Maximum Speed	1800 rpm
Recommended Speed	1500 rpm
Number of stitches	1-255
Needle System	29BD
Cylinder circumference	26 cm
Work width	28 cm

Packing dimensions complete machine

Pallet 110x58x120 cm
Gross 110,0 kg / Net 80,0 kg
Volume weight 248 kg